

产品及应用/products applications

- ◆ 具有IEC950标准插座，附带单保险管
- ◆ 外形小巧、结构紧凑、便于安装
- ◆ 优秀的传导衰减性能、性价比高
- ◆ 适用于电脑、通讯设备、液晶电视、电动玩具等(中) 小型电子设备及电子测量仪器




- ◆ It has an IEC950 standard socket, which is highly versatile
- ◆ Compact in size, well-structured, and easy to install
- ◆ Excellent insertion loss performance, high cost-effectiveness
- ◆ It is suitable for computer, communication equipment, LCD TV, electric toys, etc. (Medium) Small electronic devices and electronic measuring

技术参数/Specification


最高工作电压 Maximum operating voltage (VAC)	工作频率 Operating frequency Hz	试验电压 Hipot test voltage		工作温度 Operating temperature	绝缘电阻 Minimum insulation resistance
		P-N(VDC)	PN-E(VAC)		
250	50/60	1500	1500	-25~+85℃	>200M @500VDC

产品型号 FILTER	额定电流 Current rating (@40℃) A	外形尺寸 Housing	泄漏电流 Leakage current	电路参数 Components				重量 Weight (g)
				L(mH)	Cx(uF)	R(MΩ)	Cy(nF)	
ME180-1	1	I4	<0.3mA	5.5	0.1	1.0	2.2	50
ME180-3	3	I4	<0.3mA	3.0	0.1	1.0	2.2	50
ME180-6	6	I4	<0.3mA	1.0	0.1	1.0	2.2	50
ME180-10	10	I4	<0.3mA	0.4	0.1	1.0	2.2	50

电路原理图/Circuit Diagram

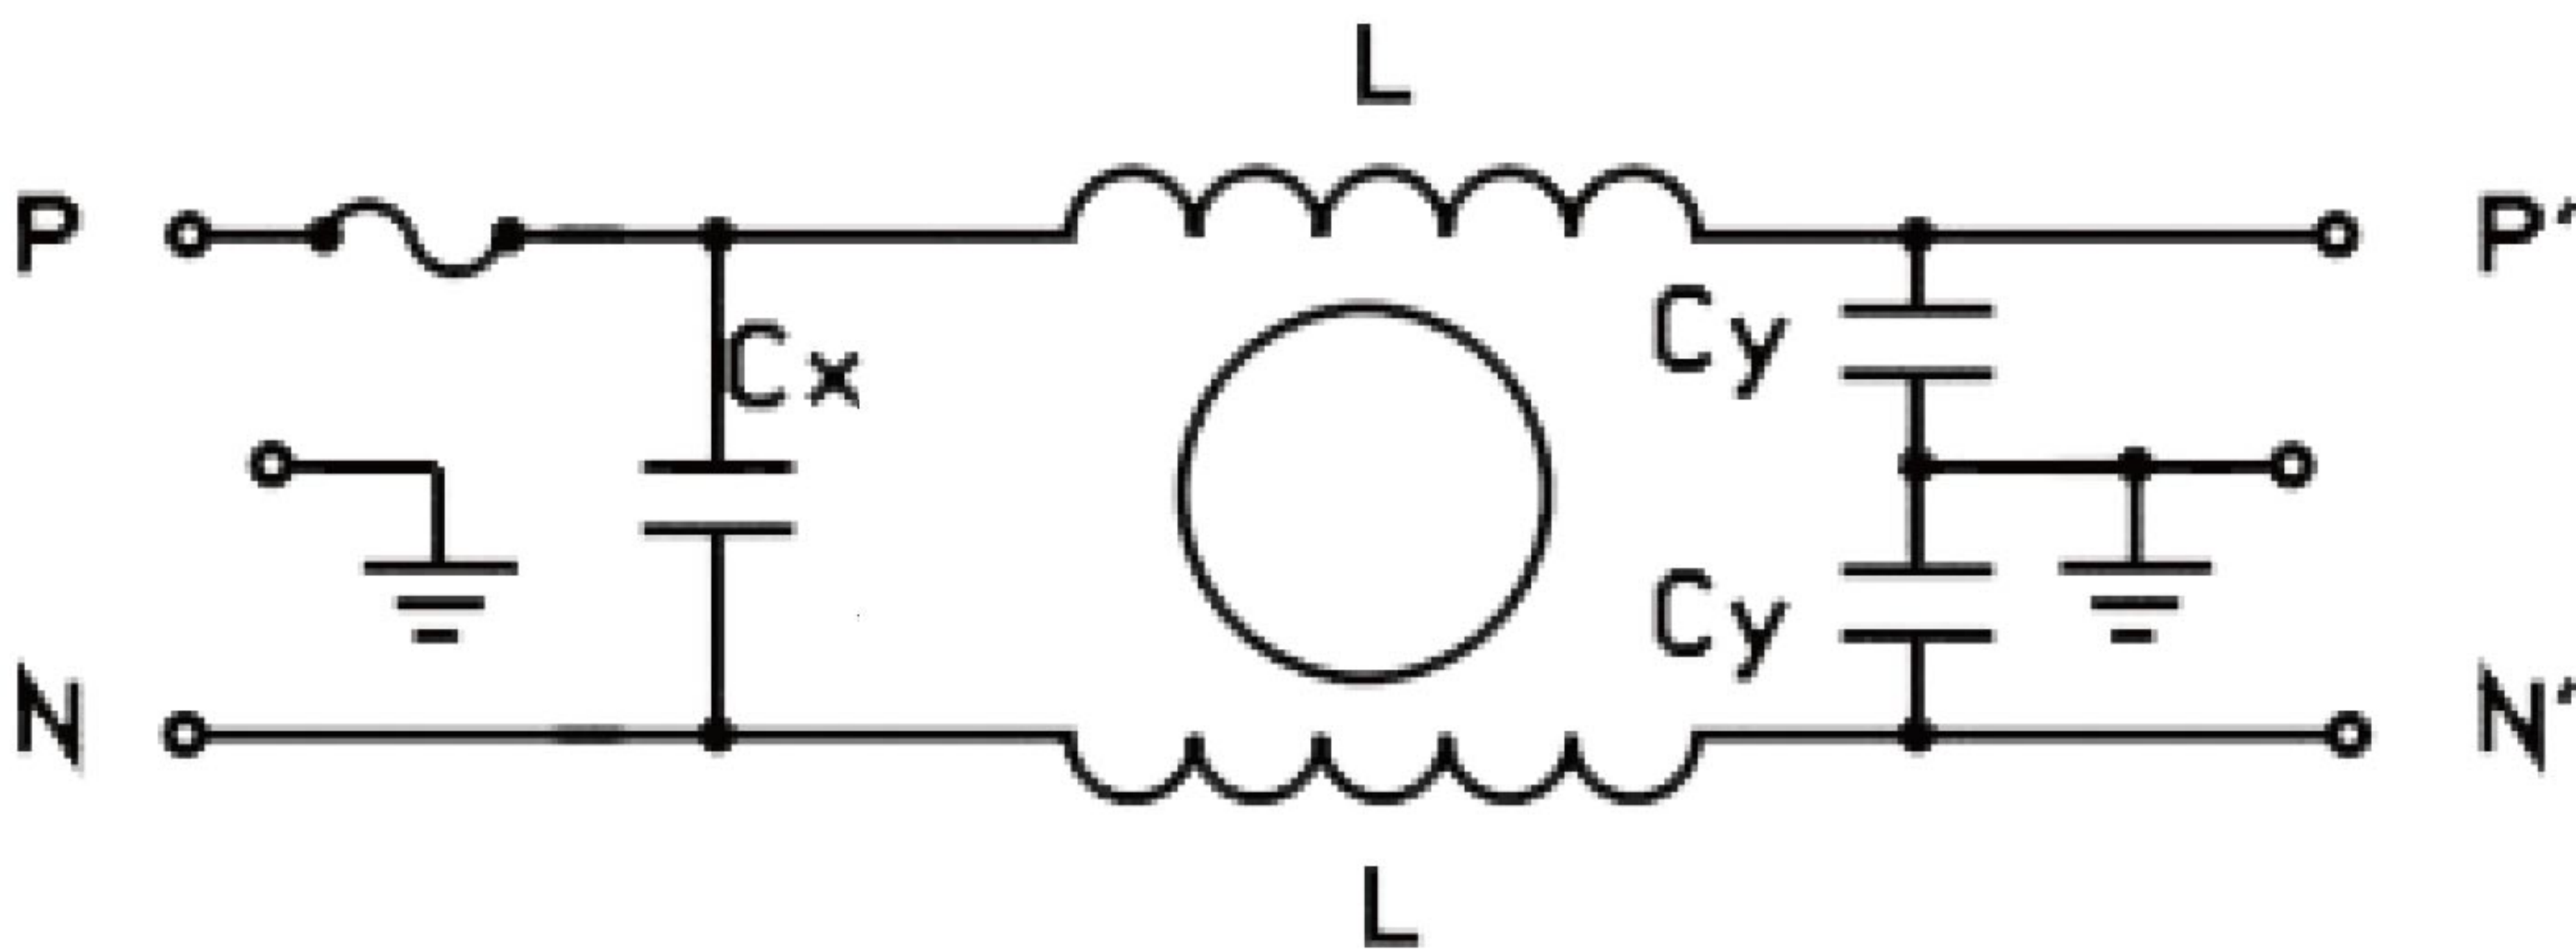

外型尺寸/Housing and dimensions: (mm)

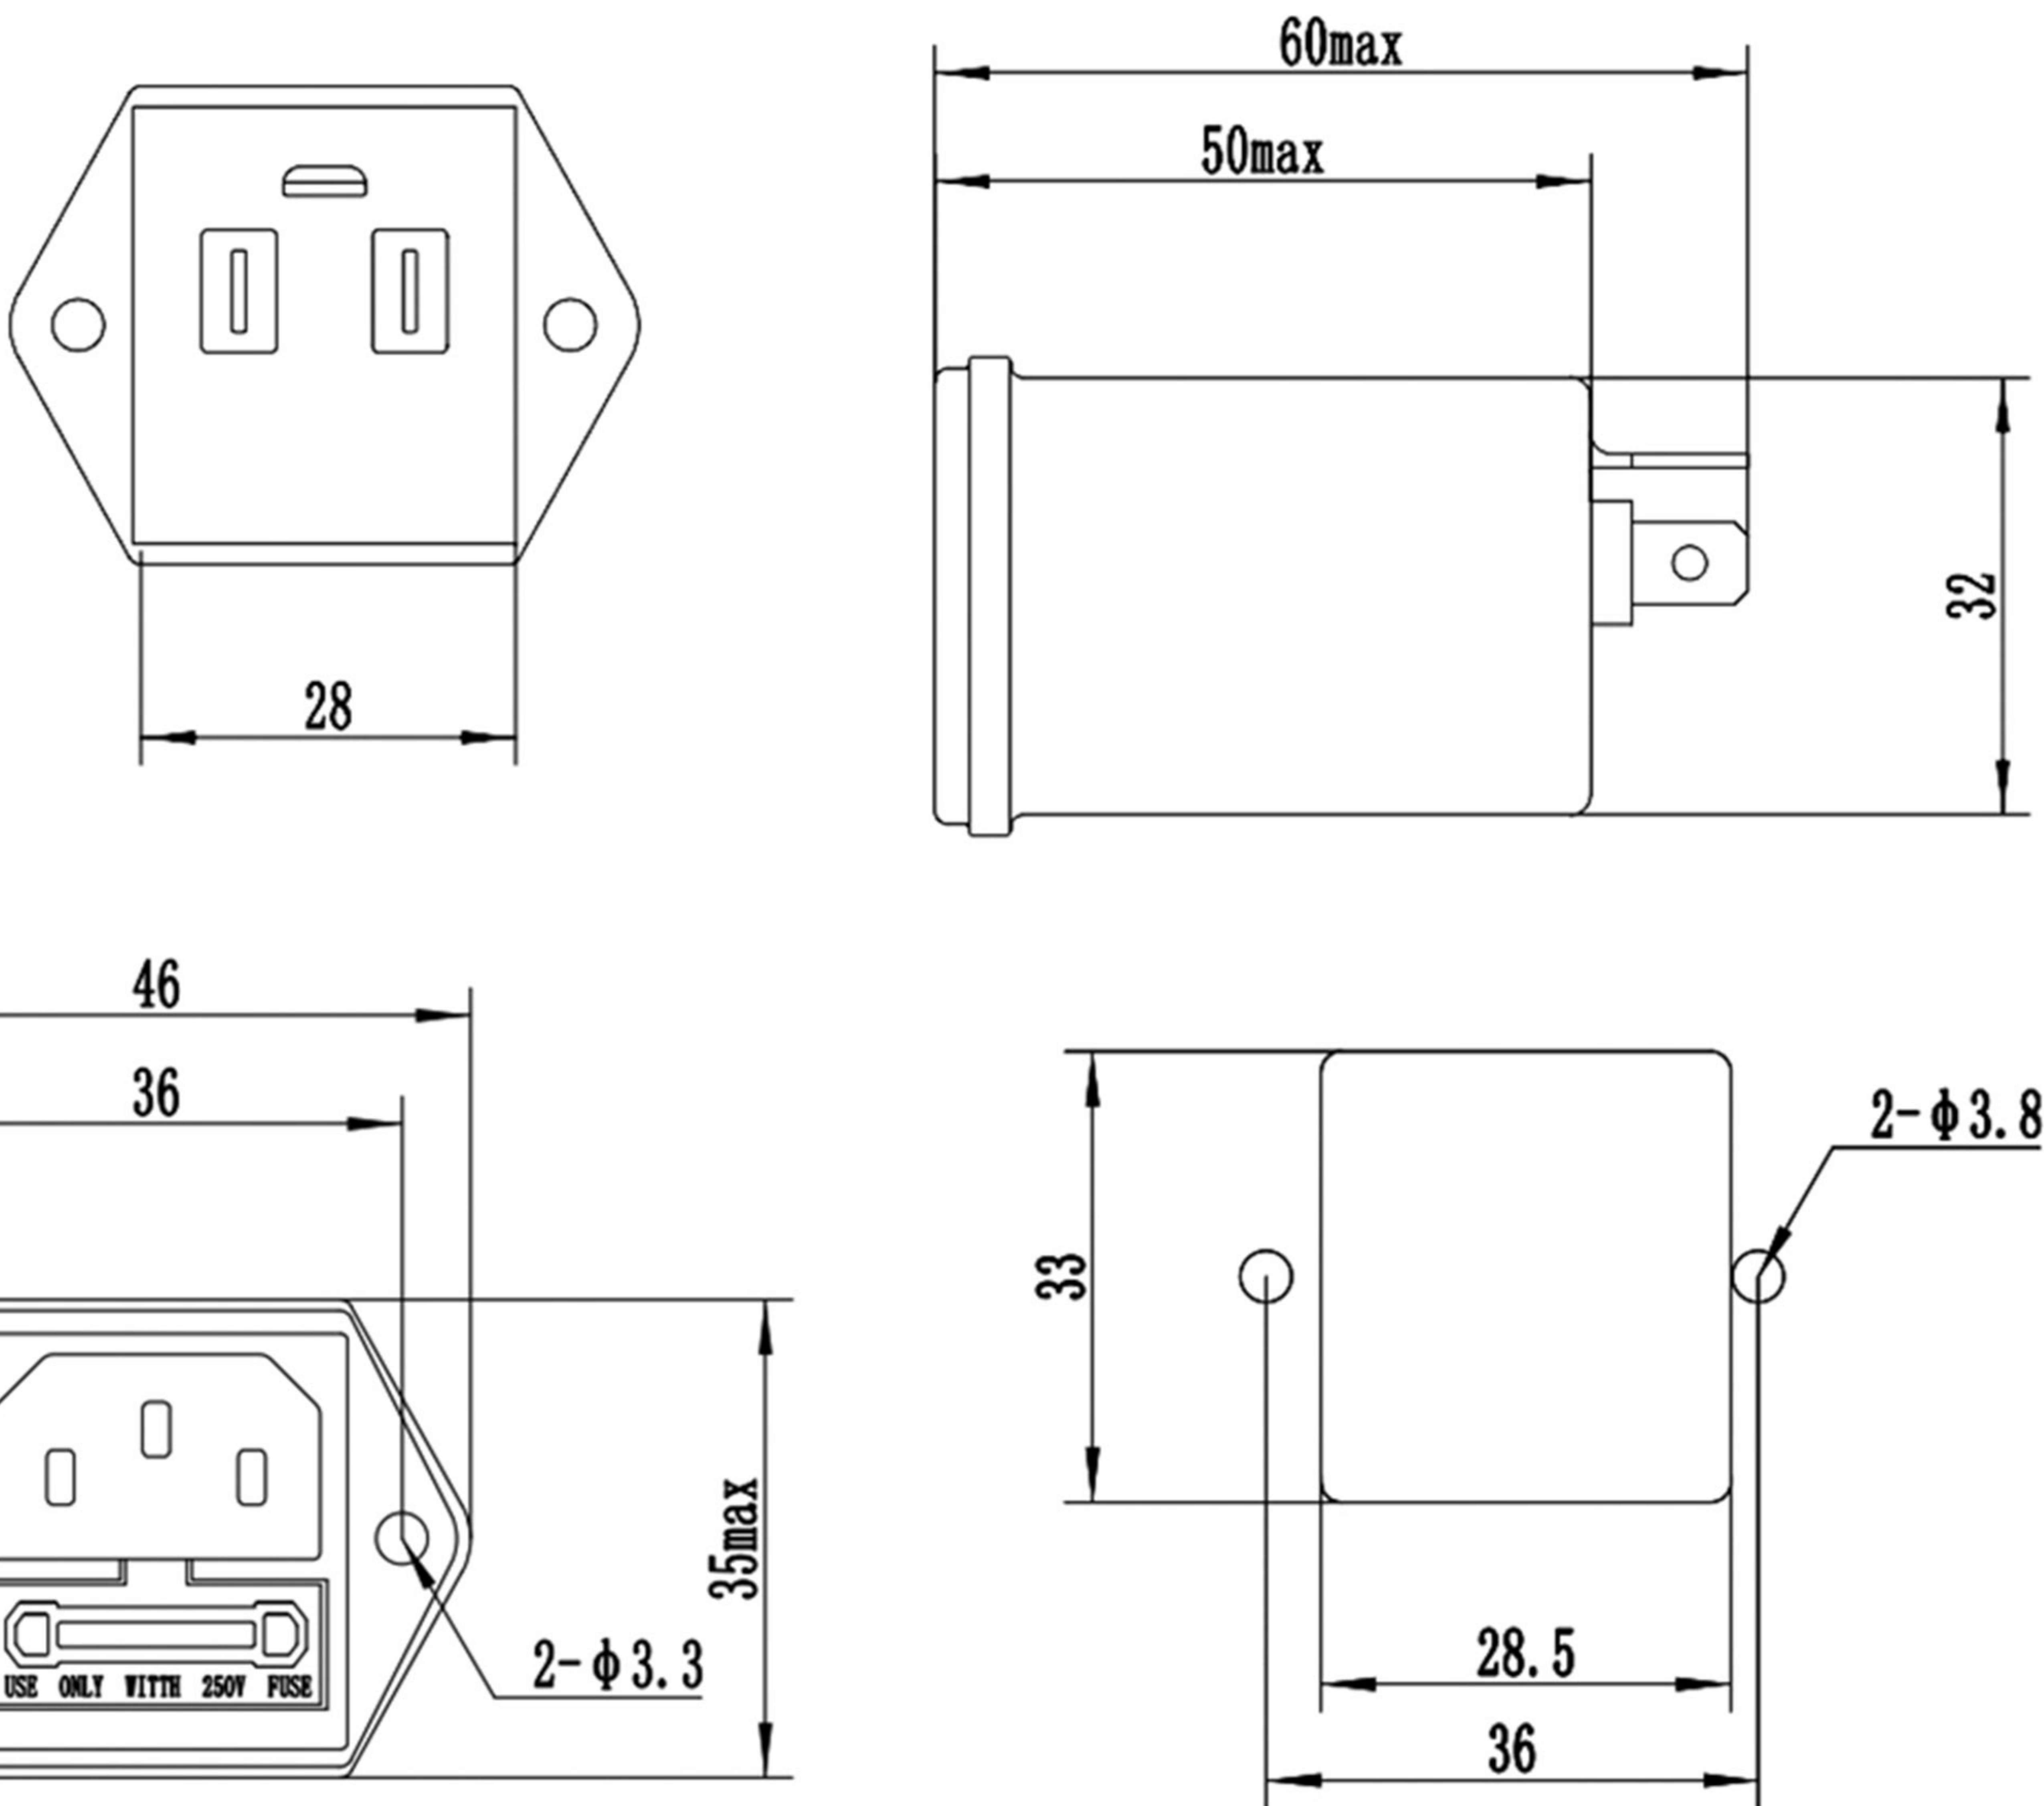

安装尺寸示意图

I4

插入损耗/Insertion loss in dB (In 50/50Ω System)

