

产品及应用/products applications

- ◆ 三相三线电源滤波器
- ◆ 三节滤波，性能优良，宽频段滤波
- ◆ 优异的滤波效果，泄露电流低，良好的共模衰减
- ◆ 适用于伺服、稳压系统等要求，广泛用于电机、逆变伺服、通讯设备、变频装置、电力驱动系统等干扰比较严重的场合

◆ Three-phase three-wire power filter

◆ Three-stage filtering, excellent performance, wide band filtering

◆ Excellent filtering effect, low leakage current, good common mode attenuation

◆ It is suitable for servo, voltage stabilization system and other requirements, and is widely used in motors, inverters, communication equipment, frequency conversion devices, and power drive systems where interference is relatively serious




技术参数/Specification

最高工作电压 Maximum operating voltage (VAC)	工作频率 Operating frequency Hz	试验电压 Hipot test voltage		工作温度 Operating temperature	绝缘电阻 Minimum insulation resistance
		P-E(VDC)	P-P(VDC)		
380/440	50/60	2700	2150	-25~+85°C	>200M @500VDC

产品型号 FILTER	端接方式 Connections	额定电流 Current rating (@40°C) A	外形尺寸 Housing	电路参数 Components	
				Cy(nF)	
ME760-5	M	5	N2	4.7	
ME760-10	M	10	N2	4.7	
ME760-20	M	20	N5	10	
ME760-30	M	30	N5	20	
ME760-40	M	40	N10	20	
ME760-50	M	50	N10	50	
ME760-60	M	60	N10	100	
ME760-75	M	75	N12	100	
ME760-100	M	100	N12	100	
ME760-200	M	200	N15	150	

电路原理图/Circuit Diagram

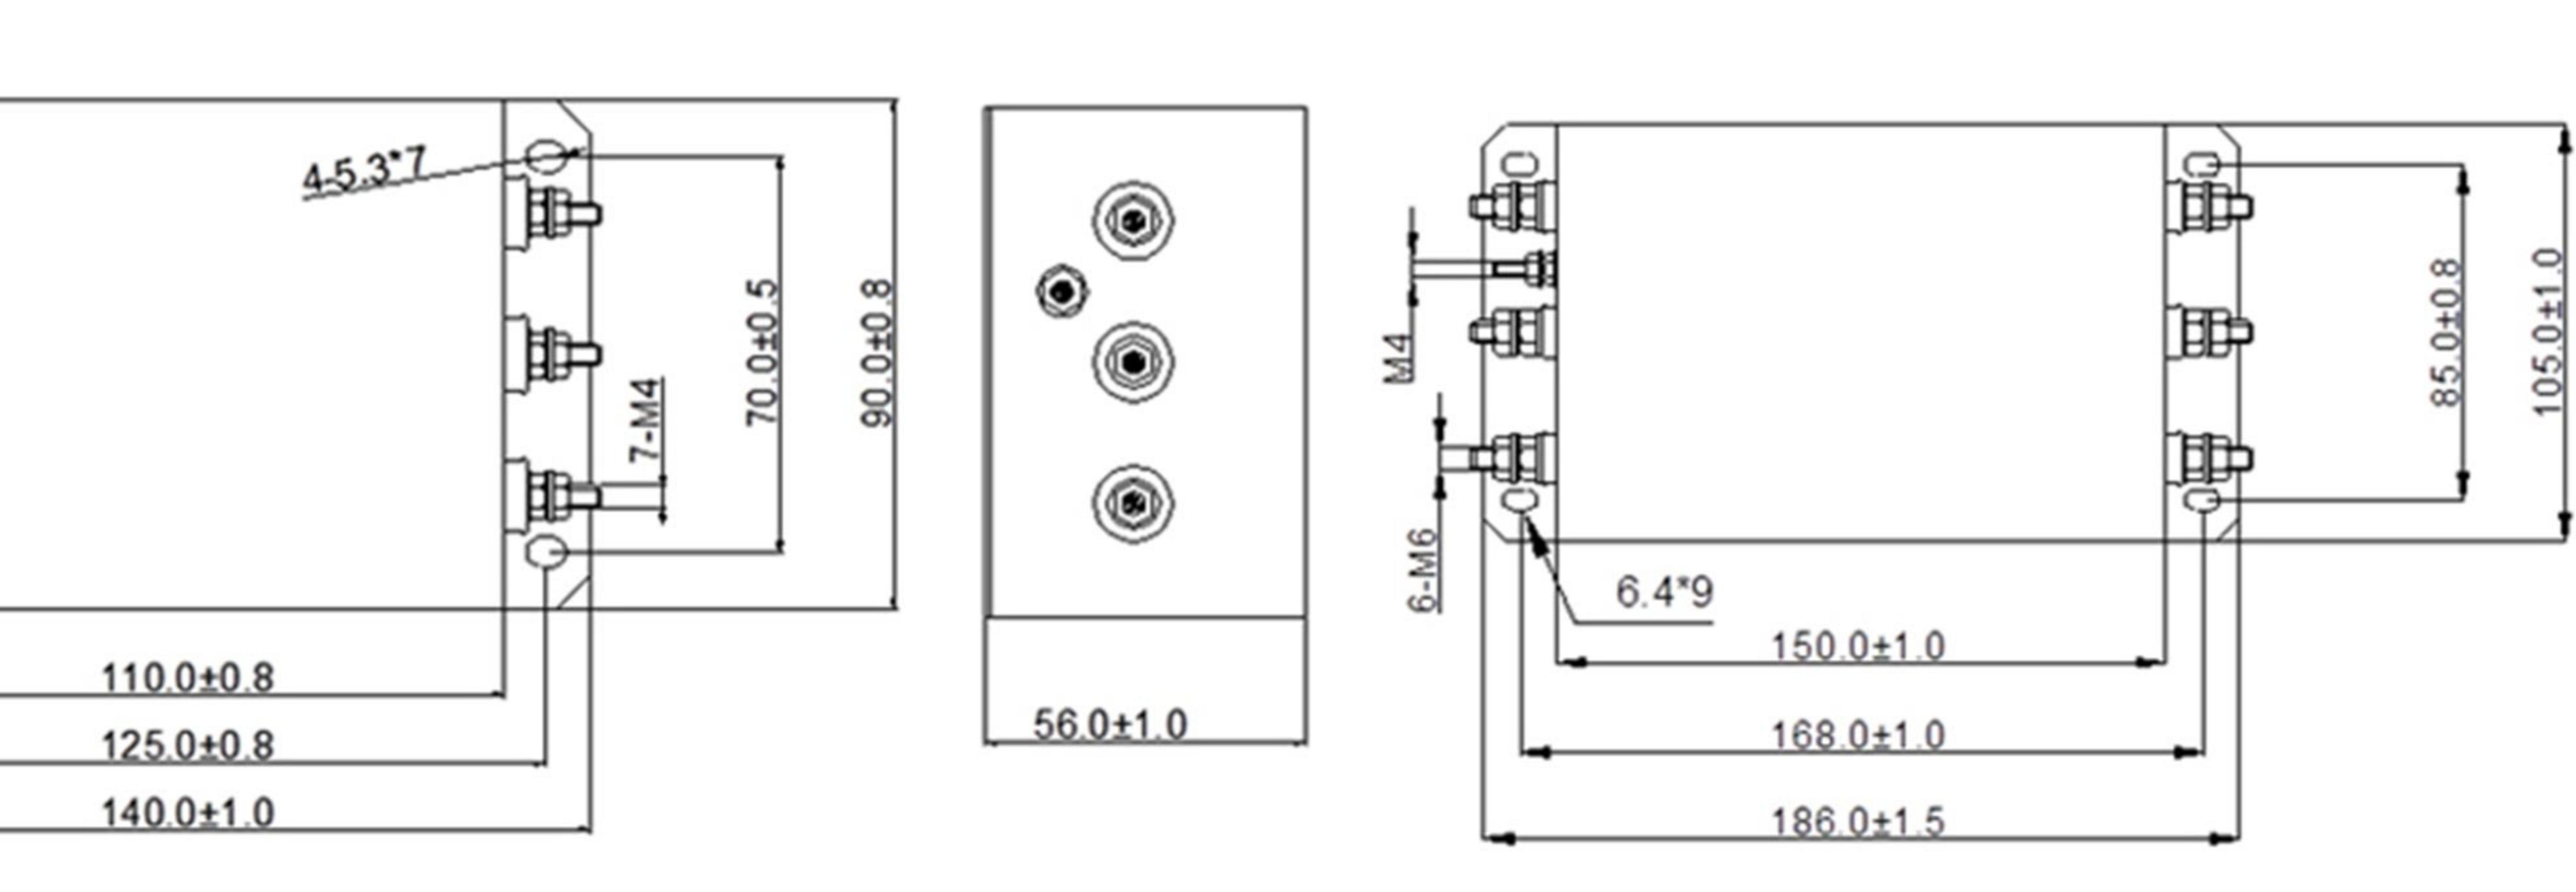

外型尺寸/Housing and dimensions: (mm)

