Products and applications

- Grab the PWM wave generated by the inverter to a sine wave
- Reduce eddy current oss and motor noise of the motor
- Reduce puse current on the output cabe and in the motor to extend the ife of the motor
- onger cabe connection between the inverter and the motor
- Reduce externa radiation. Unshieded cabes can be used in certain occasions, reducing the requirements for fied wiring
- Reduce harmonic content of power suppy and reduce conductive interference

Specification

EQUIPMENT POWER	PRODUCT NUMBER	RATED CURRENT	OPERATING FREQUENCY	INSULATION CLASS	COMPRESSIVE	DIMENSIONS	INSTALLATION SIZE	MOUNTING HOLE DIAMETER	Structure number
KW/380V	ME966L	A	HZ	LEVEL	V	(L*W*H)	(A*B)	Φ	
1.5	ME966L-3	3	50/60	F、H	3000	180*145*240	150（95）*65	Φ6	
2.2	ME966L-5	5	50/60	F、H	3000	180*135*240	150（95）*55	Φ6	
3.7	ME966L-8	8	50/60	F、H	3000	180*135*240	150（95）*55	Φ6	D1
4	ME966L-10	10	50/60	F、H	3000	180*145*240	150（95）*65	Φ6	
5.5	ME966L-12	12	50/60	F、H	3000	180*155*240	150（95）*75	Φ6	
7.5	ME966L-17	17	50/60	F、H	3000	180*155*240	150（95）*75	Φ6	
11	ME966L-24	24	50/60	F、H	3000	230*165*270	200(120)*80	Φ10*20	
15	ME966L-30	30	50/60	F、H	3000	225*185*270	200(120)*100	Φ10*20	
18.5	ME966L-40	40	50/60	F、H	3000	225*185*270	200(120)*100	Φ10*20	
22	ME966L-45	45	50/60	F、H	3000	270*185*310	240(190)*90	Φ10*20	
30	ME966L-60	60	50/60	F、H	3000	270*205*310	240(190)*110	Φ10*20	D2
37	ME966L-75	75	50/60	F、H	3000	300*210*370	180*130	Φ10*20	
45	ME966L-90	90	50/60	F、H	3000	300*230*370	180*150	Φ10*20	
55	ME966L-110	110	50/60	F、H	3000	300*230*370	180*150	Φ10*20	
75	ME966L-150	150	50/60	F、H	3000	300*230*370	180*150	Φ10*20	
93	ME966L-180	180	50/60	F、H	3000	360*270*420	300*180	Φ12*20	
110	ME966L-220	220	50/60	F、H	3000	420*270*470	315*180	Φ10*20	
132	ME966L-250	250	50/60	F、H	3000	420*270*510	315*180	Φ10*20	
160	ME966L-320	320	50/60	F、H	3000	420*270*550	315*180	Φ10*20	
187	ME966L-380	380	50/60	F、H	3000	420*270*560	315*180	Φ10*20	D3
200	ME966L-400	400	50/60	F、H	3000	480*385*585	280*330	4-Φ16	
220	ME966L-440	440	50/60	F、H	3000	480*385*585	280*330	4-Φ16	
250	ME966L-500	500	50/60	F、H	3000	480*385*585	280*330	4-Φ16	
280	ME966L-560	560	50/60	F、H	3000	480*385*645	280*330	4-Φ16	
315	ME966L-650	650	50/60	F、H	3000	480*385*645	280*330	4-Φ16	

Housing and dimensions:（mm）



D1

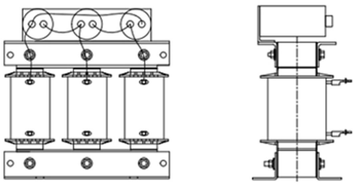

D2

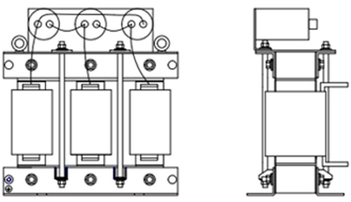

D3


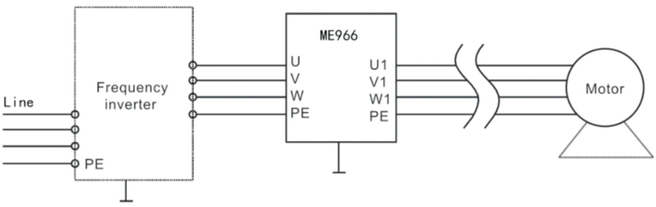
D4